

Artificial Intelligence for Engineering Design, Analysis and Manufacturing

<http://journals.cambridge.org/AIE>


Additional services for **Artificial Intelligence for Engineering Design, Analysis and Manufacturing**:

Email alerts: [Click here](#)

Subscriptions: [Click here](#)

Commercial reprints: [Click here](#)

Terms of use : [Click here](#)

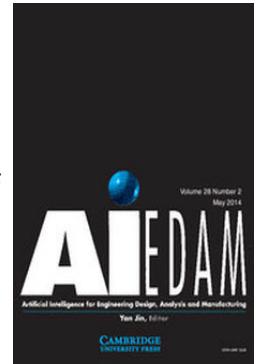

The influence of immersion and presence in early stage engineering designing and building

Daniela Faas, Qifang Bao, Daniel D. Frey and Maria C. Yang

Artificial Intelligence for Engineering Design, Analysis and Manufacturing / Volume 28 / Special Issue 02 / May 2014, pp 139 - 151
DOI: 10.1017/S0890060414000055, Published online: 16 May 2014

Link to this article: http://journals.cambridge.org/abstract_S0890060414000055

How to cite this article:

Daniela Faas, Qifang Bao, Daniel D. Frey and Maria C. Yang (2014). The influence of immersion and presence in early stage engineering designing and building . Artificial Intelligence for Engineering Design, Analysis and Manufacturing, 28, pp 139-151 doi:10.1017/S0890060414000055

Request Permissions : [Click here](#)

The influence of immersion and presence in early stage engineering designing and building

DANIELA FAAS,¹ QIFANG BAO,² DANIEL D. FREY,³ AND MARIA C. YANG³

¹School of Applied Science and Engineering, Harvard University, Cambridge, Massachusetts, USA

²Department of Mechanical Engineering, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA

³Department of Mechanical Engineering and Engineering Systems Division, Massachusetts Institute of Technology, Cambridge, Massachusetts, USA

(RECEIVED April 15, 2013; ACCEPTED October 5, 2013)

Abstract

This paper explores the role of a designer's sense of engagement in early stage design. In the field of virtual reality, presence and immersion are standard measures of an individual's sense of engagement and involvement in an activity. High levels of presence might indicate that the designer is highly focused on the work. The central research question is the following: do designers who are more engaged in design activity, as measured by presence and immersive tendency questionnaires, produce better designs? An experiment was conducted to assess presence and immersive tendencies within the context of a hands-on, open-ended design-and-build activity. The results indicated that the designers' sense of immersion and presence ranged widely as well as their sense of frustration and calmness while performing the design activity. It was found that higher levels of presence correlated with either high design performance or low design performance. Lower levels of presence correlated with average design performance. No correlations were found between immersive tendency and design performance. This study suggests that some level of presence can be linked with better design, and it implies that level of presence might serve as an indicator of performance and learning in similar design-and-build activities.

Keywords: Early Stage Engineering Designing and Building; Engagement; Immersion; Presence

1. INTRODUCTION

Designers may employ a range of tools and techniques while involved in key activities in early stage design such as generating, selecting, and evaluating concepts. A range of tools may be used to explore and evaluate ideas in order to drive the design process forward, including sketching of possible design concepts (Ullman et al., 1990; Song & Agogino, 2004; van der Lugt, 2005; Yang, 2005a, 2009; Elsen et al., 2012) and the building of prototypes of design alternatives (Gero, 1990; Houde & Hill, 1997; Yang, 2005b; Sass & Oxman, 2006; Gerber, 2009; Oehlberg et al., 2009; Viswanathan & Linsey, 2012; Neeley et al., 2013). In particular, the process of constructing physical prototypes of a design idea can uncover important design issues (Ullman, 2003) that may not be apparent from a two-dimensional representation such as a sketch. The studies referenced above demonstrate the value of tools for design, but they do not consider how the designer

personally experiences the process of designing. Some have noted that the hands-on experience of manipulating materials while building a prototype, including fabrication of components and assembly, provides the designer with an opportunity to reflect and interact with a design while exploring and evaluating the space of design concepts (Schön, 1983). The act of creating a design through sketching has been described as a “dialogue” with paper (Cross, 2011), suggesting that there is some level of engagement between the designer and the act of sketching.

In studies of creativity, Csikszentmihalyi (1996) more generally discussed the notion of “flow” that experts experience while absorbed performing an activity that allows them to lose sense of time. *Flow* is defined to be the feeling of full control over the activity (Csikszentmihalyi, 1996). It is characterized by concentrating and focusing of an activity, being intensely involved with clear understanding of goals and feedback. People in flow have a distorted sense of time. While presence is often described as immersion into a virtual environment (VE), flow is referred to as an experience of immersion into a certain activity (Csikszentmihalyi, 1996). Flow is evaluated on task characteristics.

Reprint requests to: Maria C. Yang, Department of Mechanical Engineering and Engineering Systems Division, Room 3-449B, Massachusetts Institute of Technology, 77 Massachusetts Avenue, Cambridge, MA 02139-4307, USA. E-mail: mcyang@mit.edu

This paper seeks to better understand how design-and-build activity may be linked with the designer's sense of engagement while creating the design and with the eventual design outcome. Design-and-build activity requires a designer to manually assemble, join, and test a physical externalization of a design. To assess designer engagement, we turn to *immersion* and *presence*, metrics borrowed from the field of virtual reality. There is no one universally agreed-upon definition of *presence*, though two commonly cited in the literature define presence as the extent to which an individual has the feeling of being engaged in the moment (Schubert et al., 1999; Insko, 2001, 2003) or the "experience of being in one place or environment, even when one is physically situated in another" (Abuhamdeh & Csikszentmihalyi, 2009). For example, a person playing a video game set on the planet Mars might have the sensation of being on Mars, though in reality he or she is physically located in his or her living room. Presence, in particular, has been shown to have some positive correlation with performance on virtual tasks (Witmer & Singer, 1998), and this explores if there is a similar effect on real-world design tasks. *Immersive tendency* also relates to the sense of involvement in an activity, but it is considered an individual trait and relates to the tendency to behave playfully and to become involved in a continuous stream of stimuli (Mantovani & Riva, 1999). For example, one person reading a book might become so deeply engaged, or "in the moment," that he or she loses awareness of his or her surroundings. However, another person reading might not experience such immersion. This deep engagement with a given task is very much dependent on the individual. Immersion can lead to presence, which is the user's sense of being in the virtual environment. Both presence and immersion are components relating to the sense of being involved in a task.

The research questions this paper explores are the following:

1. *What is the nature of immersion and presence in the context of early stage design-and-build activities? How are immersive tendencies and presence linked to the design process? Presence and immersion are important to virtual reality applications and measure how well a person "responds" to the virtual environment, and we believe these tendencies have relevance to how designers may perform in the real world. Engineering design has developed its own criteria to gather information during the design process. If we assume that presence and immersion are related to a notion of flow, can it be that designers experience a similar feeling while designing? Verlinden et al. (2004) have studied the use of augmented virtual reality systems to support design prototyping, but in this paper we consider presence and immersive tendencies of the individual designer, rather than as a virtual reality technology.*
2. *Do immersive tendencies correlate with better design? Does more engagement mean better performance? Not being engaged in an activity would seem to mean poorer performance, but is the converse true?*

In this study, we assess participants' levels of presence and immersion during the process of hands-on designing and prototyping activity in the real (rather than virtual) world. The performance of the resulting designs is then correlated with presence, immersion, and other factors.

2. BACKGROUND

2.1. Presence and immersive tendency in the virtual world

Presence and immersive tendency have been studied extensively in the field of virtual reality (McMahan, 2003). In order for virtual reality to seem real, the environment must respond authentically to the user's actions. Virtual reality technology allows the user to be present in a virtual world and to be mentally immersed, while the virtual reality system senses the user's position and actions and responds to one or more of the user's senses. The key elements of the virtual reality experience are the virtual world, immersion, sensory feedback, and interactivity.

Presence can be a major factor that determines the quality and success of a virtual environment implementation. Witmer and Singer (1998) suggest several factors such as selective attention, involvement, and immersive response as necessary to experience presence. Others identified different factors contributing to presence such as spatial presence, quality of immersion, involvement, drama, interface awareness, exploration of virtual environment, predictability, and interaction realness (Schubert et al., 1999).

The tendency to experience presence is considered a personal characteristic of the user. Witmer and Singer (1998) therefore suggested another factor in presence measurement called immersive tendency. This can be a personal tendency to be drawn into reading a book or involved in another activity. Research by Samana et al. (2009) determined that personality traits such as empathy correlated with the experience of presence. Several studies have shown that presence tends to increase as the fidelity of a reproduction or simulation of the physical world increases. This can be done with high-resolution displays, physics simulation, sound location, or other measures.

The Presence Questionnaire (PQ) has been used to compare presence in a real office environment and virtual reality office. The study found that there was no difference in presence between the two environments. The researchers then tried to explain why people felt equally present in virtual reality and "real" reality. Usoh et al. (2000) write, "In the real-world, since there is no doubt that the individual is present in the obvious sense, it becomes reinterpreted as the sense of involvement, the lack of isolation, perhaps the degree of comfort." The questionnaire has been criticized in the way it correlates individual scores with the sum of scores (Mantovani & Riva, 1999; Slater, 1999). Insko (2003) points out that the problem with any questionnaire is that two people may have different responses in the same environment. He claims the PQ measures the user's perception of system properties, rather than psychological presence (Slater, 1999). However,

this questionnaire was chosen for the experiment in this paper because it standardizes the information gathering process for this study.

Immersive tendency is considered a trait and relates to the tendency to behave playfully and to become involved in a continuous stream of stimuli. Witmer and Singer's Immersive Tendencies Questionnaire (ITQ) contains 29 items (Witmer & Singer, 1983). For example, "How mentally alert do you feel at the present time?" tests the current "state" of the user and "Have you ever remained apprehensive or fearful long after watching a scary movie?" tests the trait. There is some interrelatedness between the PQ and the ITQ. A greater sense of immersion will produce higher levels of presence. Major components that increase the level of immersion include isolation from the physical environment, perception of self-inclusion in the virtual environment, natural modes of interaction and control, and perception of self-movement. Witmer and Singer characterize immersion as a psychological state where one perceives to be engaged by an environment that provides a continuous stream of stimuli, experiences, and interactions.

Subscales for both the ITQ and the PQ were identified from the previous analysis by Witmer and Singer (1998). The subscale labels are loosely based on the content of the questionnaire items in their cluster. The ITQ contains three subscales: involvement, focus, and games. Subscales for the PQ include involvement, sensory fidelity, adaptation/immersion, and interface quality. Other researchers have tried to qualitatively define immersion with taxonomies (Robinett, 1992; Zeltzer, 1992), but the ITQ and the PQ, developed and revised by Witmer and Singer, continue to be the standard in virtual reality research. Witmer and Singer showed that the PQ and ITQ are internally consistent measures with high reliability. In several of their studies, a weak but consistent positive relation between presence and task performance in VEs was shown, and individual immersive tendencies measured by the ITQ predicted presence as measured by the PQ. Witmer and Singer reported internal consistency measures of reliability of 0.75 for the ITQ and 0.81 the PQ using the Cronbach α . They also reported a mean score on the PQ of 98.11 ± 15.78 when tested in their VE.

These questionnaires have been used extensively to assess immersion and presence in many applications. Swindells et al. (2004) used presence and immersive tendencies to compare different virtual reality configurations. Pausch et al. (1997) used these questionnaires to compare a virtual reality interface with a "real" stationary monitor and a hand-based input device. Users completed a search task faster with the virtual reality setup than did users with monitor and handheld device. Banerjee et al. used their own modified version of the ITQ and the PQ to show that virtual environments are advantageous for conceptual design reviews over traditional methods (Banerjee et al., 2002; Banerjee & Basu-Mallick, 2003). Darken et al. (1999) used the ITQ and the PQ to develop quantitative measures of attention and spatial comprehension.

Other studies compare the performance of multiple immersive displays and input for virtual reality applications devices

(Welch, 1999). Robertson et al. (1997) determined that head-mounted displays performance characteristics did not transfer to desktop virtual reality. Stothard et al. (2008) used immersion and presence levels to assess mine workers in interactive training. Nichols et al. (2000) compared the use of direct performance measures and rating scales to evaluate presence for different virtual environments.

Virtual reality has been used in engineering design to facilitate interaction with models, assembly prototyping, and other uses. Examples of engineering design in virtual reality include hose routing planning, visualizing computational fluid dynamics, and product reviews. In assembly prototyping, it has been shown that the use of virtual environments helps users perform assembly tasks (Ye et al., 1999). This study differs from prior work in that it considers the role of immersion and presence in the *process* of design and assembly, not as a comparison with virtual experiences.

2.2. Presence and immersive tendency in the real world

Some people experience high levels of involvement with other media than VE, such as movies, books, and video arcade games. They feel that they are part of that environment or they identify strongly with a character in a book, movie, or video game. During immersion, these individuals put themselves in that character's place and experience what that character experiences. They become immersed in that character's world. A dream is another example of a high level of immersion other than a VE. Witmer and Singer (1998) believe that both involvement and immersion are necessary for experiencing presence. Furthermore, psychology reviews suggest that humans can experience varying degrees of presence at any given time in any given physical place. This is largely dependent on how much attention is divided between the physical world and the mental world (e.g., memories, daydreams, and planned activities). The extent of the person's involvement in any environment and how much presence he or she reports is dependent on how sharply he or she focuses attention in any given task.

No distractions were present in this study; all experiments were conducted in a room with closed doors. This is consistent with VE research, where participants are engaged in their activity but not aware of the observers or other distractions. None of these studies include mascots or character passing by. Of course, the PQ and ITQ questionnaires are self-reporting and are a standard set of tools to evaluate users in virtual environments. The PQ and ITQ questionnaires are geared toward a task and measuring the presence while the person is doing the task.

3. METHODS

3.1. Participants

The study involved 30 graduate and undergraduate students in a mechanical engineering department at a US university. The participants were solicited through E-mail and posters.

Table 1. Sample questions from the Immersive Tendencies Questionnaire (rated 1–7)

Do you ever get extremely involved in projects that are assigned to you by your boss or your instructor, to the exclusion of other tasks?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
OFTEN			OFTEN			OFTEN
Do you ever become so involved in a video game that it is as if you are inside the game rather than moving a joystick and watching the screen?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
OFTEN			OFTEN			OFTEN
How good are you at blocking out external distractions when you are involved in something?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
GOOD			GOOD			GOOD

The sample population was composed of 14 females and 16 males, with ages ranging from 18 to 31 years (mean = 23 years). The participants reported an average of 7 years of design experience (including both classroom and industry experience). On average, they spend 11 h per week on design-related activities while at school. In addition, the students took five design classes during their studies. No compensation was provided to the participants. Each participant worked individually in an isolated room. Participants did not have access to view other designs, and the results from other participants were not divulged to any participants because this could potentially influence the design outcome.

3.2. Procedure

Each experiment consisted of three phases that, altogether, took approximately 1 h to finish. During the introductory phase, participants were presented with the informed consent form and given time to ask questions and fill out the form. Users received an overview of the study. In addition, participants were asked about their age, gender, education level, and

duration of previous design experience. Next, they were asked to complete the ITQ, a sample of which can be seen in Table 1. The instructions asked respondents to place an “X” for each question in the appropriate box.

The second phase was the design-and-build task, which is detailed in the next section. The third phase required the participants to fill out the PQ to assess how engaged participants were in the design-and-build activity. Sample questions are shown in Table 2. In addition, all participants filled out a post-completion survey (described later) to assess their experiences during the activity. Finally, participants were asked to write down how many concepts they generated in their mind before deciding on their final design.

3.2.1. Design-and-build task

Task. Each participant was instructed to build a device to vertically displace a Ping-Pong ball as great a distance as possible. Participants were allowed to test their design throughout the given time frame. Each participant was given 30 min to complete the task, which was made clear in the design instruction document. Detailed instructions on the de-

Table 2. Sample questions from the Presence Questionnaire (rated 1–7)

How aware were you of events occurring in the real world around you?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
AWARE			AWARE			AWARE
How involved were you in the building experience?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
INVOLVED			INVOLVED			INVOLVED
Were you involved in the experimental task to the extent that you lost track of time?						
1	2	3	4	5	6	7
NOT			MODERATELY			VERY
MUCH						MUCH

sign task, including the time limit and materials available, were given in a design instruction sheet. This limit was determined through a pilot study of three individuals with the time sufficient to finish one working design. A timer was visible to the participants at all times. An “official” measurement was made at the end of the activity, though participants were free to ask for measurement at any point during the activity.

Materials. Participants were provided with a kit of prefabricated components, including 72 aluminum and stainless steel components in various shapes and sizes, axles, string, rubber bands, and fasteners (Fig. 1), to build their design. Prefabricated components were chosen for this experiment because they would not require participants to have any prior part fabrication skills. No training was given on how to build with the kit because it was assumed that participants had sufficient mechanical engineering background to do so. Participants were instructed to use a rectangular plate as the base for their devices, allowing designs to be more easily compared.

A 500-g weight was provided to serve as an energy source. The device’s mechanism had to be activated manually as specified in the design prompt. The metal pieces were purchased from Gear Educational Systems, LLC in Hanover, Massachusetts (www.geareds.com).

A set of tools, including hex wrenches, scissors, and screwdrivers, was provided (Fig. 2). It should be noted that the participants were instructed not to make drawings during the

design activity. Although it is well known that sketching is a key activity in design, the goal of the experiment was to assess the relationship between a design-and-building activity and a participant’s engagement in the activity. If sketching had been permitted, the results could be potentially confounded.

3.2.2. Design outcome measures

Three measures of design outcome were observed.

1. *Maximum vertical displacement of ball:* The vertical displacement was determined by the initial and final position of the ball. A one-time measurement was made for each design at the end of the time limit.
2. *Novelty of designs:* The novelty of the designs was assessed based on methods introduced by Shah et al. (2003). Each design was divided into four attributes: ball-raising mechanism, ball attachment method, footprint of structure, and structural rigidity. Each attribute was given a novelty score S_i and a weight p_i , so the overall novelty of ideas within each group can be computed by

$$M_{\text{Novelty}} = \sum_{i=1}^4 S_i p_i. \quad (1)$$

In the following result analysis, the weight p_i ($i = 1, 2, 3, 4$) was chosen to be 1; therefore, all four evaluation criteria for novelty are of equal importance.

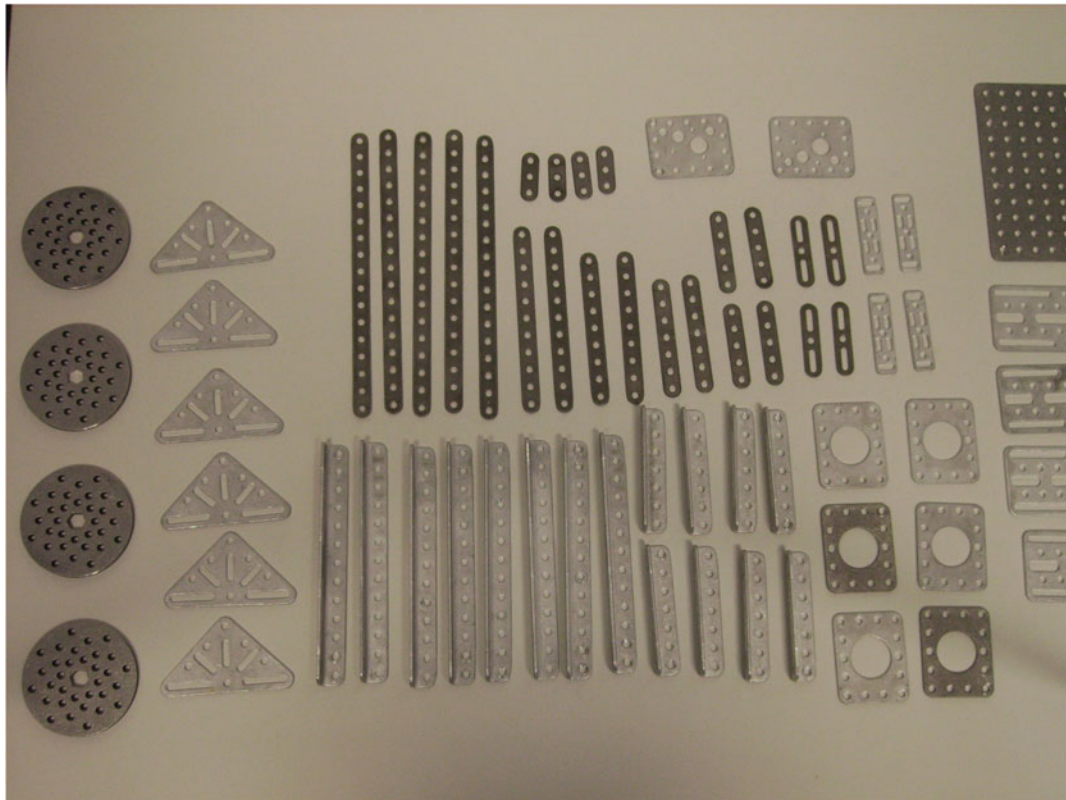


Fig. 1. (Color online) A sample of parts available to participants for design and assembly.



Fig. 2. (Color online) The tools available to participants for assembling parts.

For each design, the solution of every attribute was categorized. The novelty score, S_i , was given by

$$S_i = \frac{T_i - C_i}{T_i} \times 10, \quad (2)$$

where T_i is the total number of solutions produced for the i th attribute and C_i is the count of the current solution for that the i th attribute. Multiplying by 10 normalizes the expression.

3. *The participant's assessment of their experiences during the design-and-build activity:* A postcompletion survey asked participants to note how frustrated or calm they felt during building, how satisfied they were with their final design, and how confident they were during the process of designing, all using 7-point Likert scale (as described by Witmer & Singer, 1998).
4. *The quantity of concepts generated, as reported by the participant.*

4. RESULTS AND DISCUSSION

All statistical analysis is given as mean \pm standard deviation. All 30 participants completed a mechanism within the allotted 30 min. The average displacement measured was 21.43 ± 15.46 in. The minimum displacement was 0 in (nonfunctional design) and the maximum displacement was 64 in.

Efforts were made to find correlations between the design outcome, presence and immersion levels, demographic data, and postsurvey results. A multivariate analysis of variance (ANOVA) was used to determine the interaction effects between the factors (e.g., the interaction effects of demographic information and presence level on the design outcome). However, no significant correlation emerged between these factors.

In addition, a one-factor regression model and ANOVA were applied, which revealed some significant results. These,

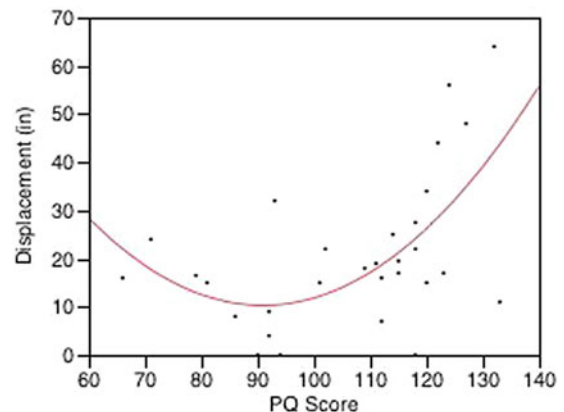


Fig. 3. (Color online) The ball displacement versus Presence Questionnaire (PQ) score. A curved trend line is shown.

together with other important analyses, are presented in the following.

4.1. Presence

The mean PQ score for the 30 participants was 106.32 ± 18.05 , with a maximum score of 133 and a minimum of 66 (see Fig. 3). As a reference point, a score of 100 means that an individual has a high sense of presence. Displacement was plotted against presence and fitted with a quadratic model:

$$\begin{aligned} \text{Displacement} = & -47.143 + 0.582 \text{ Presence} \\ & + 0.019 (\text{Presence} - 106.333)^2, \end{aligned} \quad (3)$$

where Displacement is the maximum ball displacement and Presence is the score on the PQ. An ANOVA was used to analyze the data. The result showed the significance of the model [$F(1, 28) = 7.2236, p = 0.0031$].

The quadratic model shows that participants who were the least present did not necessarily perform the worst. However, participants with the highest presence scores did tend to attain a higher ball displacement. This could mean that people who are deeply engaged “in the moment” produce more effective designs. This finding is consistent with our initial expectation of the link between presence and design outcome.

4.2. Immersive tendencies

The mean score for the 30 participants on the ITQ was 107.27 ± 16.60 , with a maximum score of 147 and a minimum of 73. A higher score on the ITQ means a higher level of immersion. An ANOVA did not show a statistically significant correlation between immersive tendencies and design outcome [$F(1, 28) = 0.499, p = 0.486$; Fig. 4].

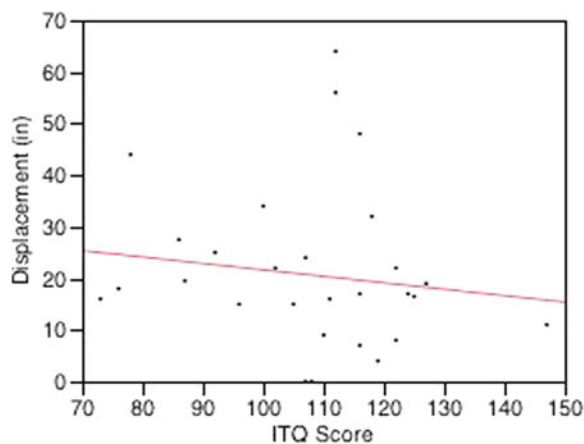


Fig. 4. (Color online) The ball displacement versus Immersive Tendencies Questionnaire (ITQ) score. A linear trend line is shown.

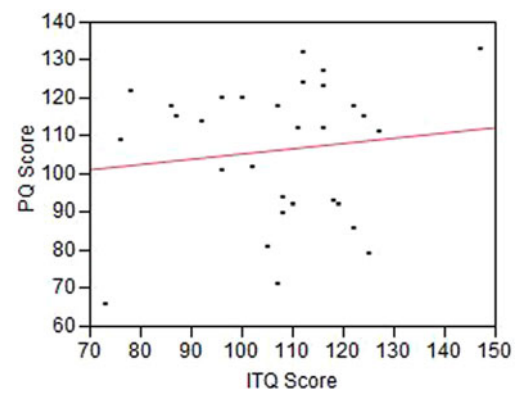


Fig. 5. (Color online) The Presence Questionnaire (PQ) score versus the Immersive Tendencies Questionnaire (ITQ) score. A linear trend line is shown.

4.3. Immersion versus presence

Because an immersive tendency can lead to presence, the correlation between immersion and presence was examined. We could hypothesize that a participant with a higher immersive tendency would also score higher on presence.

Immersion is plotted against presence in Figure 5. An ANOVA was determined for the correlation of immersion and presence, showing no significance of the model [$F(1, 28) = 4.623, p = 0.502$].

4.4. Types of designs and immersion

All of the devices generated by the participants were analyzed by the authors after the fact to determine if there were common types of designs. It was surprising that three distinct categories of devices emerged. First, mechanisms were identified as pulleys if the mechanism used string to enable ball displacement. Second, mechanisms that relied on a pivot point were categorized as fulcrums (Fig. 6). Third, a mechanism was typed as a catapult if the ball required exiting the mechanism at any point. Ball attachment to the mechanism could also be placed into two categories. One was a loose connection (ball was placed in some type of basket or other holding mechanism), but there was no physical connection between the ball and the support structure. The second connection was made either with string or with rubber bands or a combination of rubber bands, string, and metal pieces, typically seen in fulcrums and pulley designs.

Figure 7 shows a box plot distribution of each of the mechanism displacements. Thirteen participants designed a pulley system (18.19 ± 4.46 in.), 10 participants created a catapult (21.85 ± 5.08 in.), and 7 implemented a fulcrum (23.79 ± 6.07 in.). A one-way ANOVA was used to test the difference in performance among the three types of structures and the differences were not found to be significant [$F(2, 27) = 0.3129, p = 0.734$].

Tukey post hoc comparisons of the catapult ($M = 114.8, p = 0.069$), fulcrum ($M = 114.8, p = 0.302$), and pulley ($M = 114.8, p = 0.557$) indicated that building a certain structure

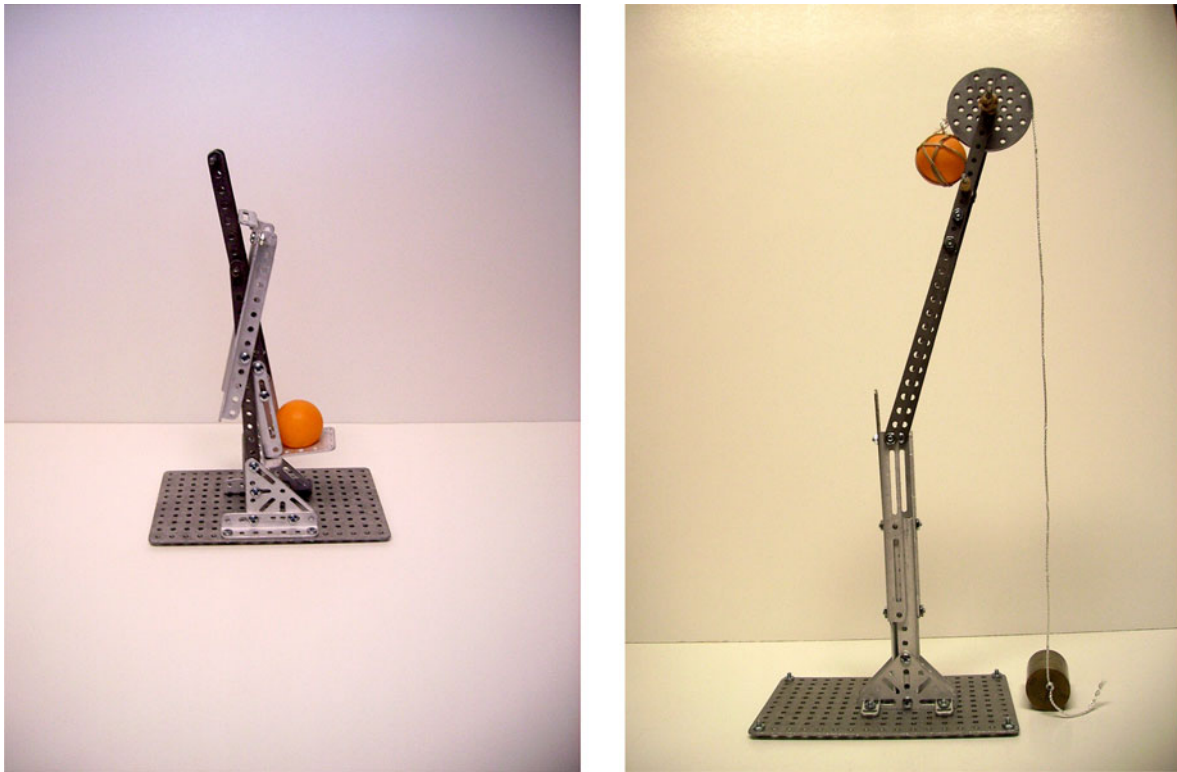


Fig. 6. (Color online) An example of a (left) fulcrum design and (right) pulley system.

did not result in a higher level of immersion (Fig. 8). Participants who built a catapult had a higher level of immersion than participants that built a pulley, but the difference was not statistically significant.

4.5. Novelty of designs

The average novelty score was 25.2 ± 2.3 , and the highest score was 32.03 and the lowest was 16.66 (see Fig. 9).

Figure 9 and Figure 10 show the novelty score versus immersion score and presence score, respectively. No significant correlations were found, with ANOVA results of $F(1,$

$28) = 1.4945$ ($p = 0.2317$) and $F(1, 28) = 0.6671$ ($p = 0.4210$), respectively. Figure 11 shows the novelty score plotted against the displacement of the raised ball. A second order fit can be found between the two data sets with a significant ANOVA results [$F(1, 28) = 4.5603, p = 0.0197$].

$$Novelty = 27.225 - 0.135 Displacement + 0.004 (Displacement - 20.717)^2. \quad (4)$$

From the plot we can see that designs judged to have the highest novelty frequently did not work well (failed to raise the ball to

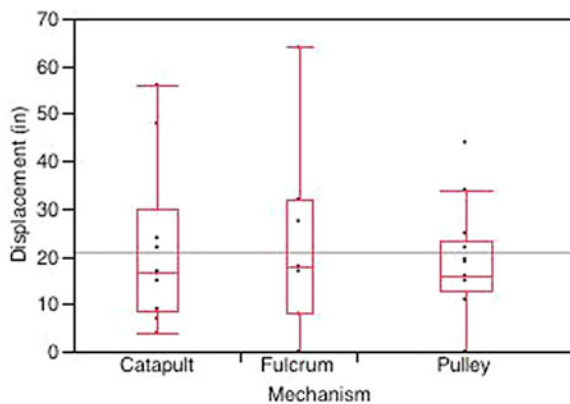


Fig. 7. (Color online) A box plot of the ball displacement differences between different types of design (catapult, fulcrum, pulley).

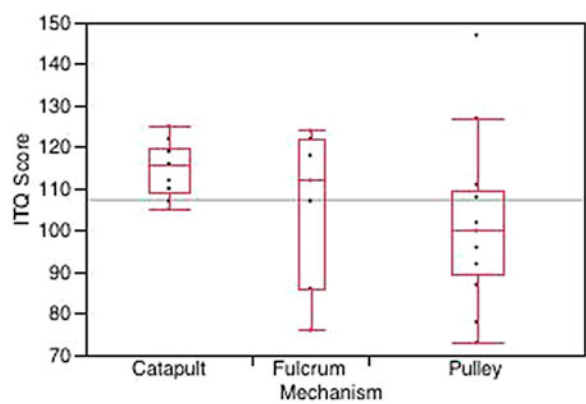


Fig. 8. (Color online) A box plot of the Immersive Tendencies Questionnaire score differences between different types of design (catapult, fulcrum, pulley).

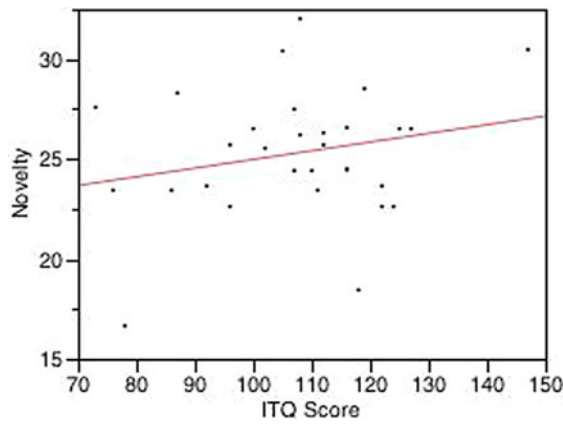


Fig. 9. (Color online) The novelty score versus Immersive Tendencies Questionnaire (ITQ) score. A linear trend line is shown.

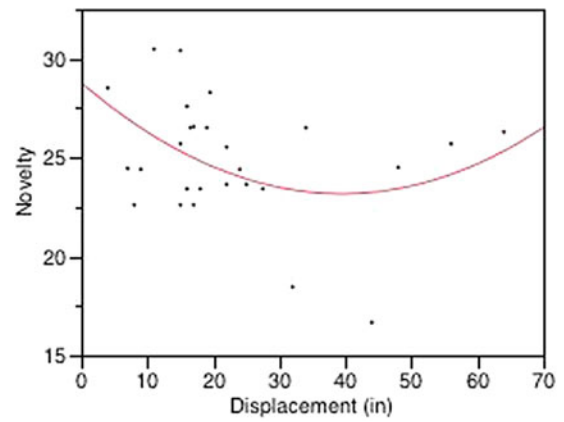


Fig. 11. (Color online) The novelty score versus ball displacement. A curved trend line is shown.

high positions). However, those that did work well (raised the ball to a high positions) generally had rather high novelty scores.

4.6. Surveyed qualities

The participants evaluated their frustration at 4.5 (interquartile range = 3.25–6), indicating a low level of frustration. They reported that they were highly engaged during the activity at 5.87 (interquartile range = 5–7). Furthermore, the participants were satisfied with their final designs (4.2, interquartile range = 3–5) and would continue on their designs if they had been given more time (6.7, interquartile range = 7–7).

Figure 12 shows the surveyed frustration levels and the presence score. The ANOVA result showed significance of the fit [$F(1, 28) = 8.7239, p = 0.0063$].

Figure 13 provides the surveyed confidence levels and the presence score. An ANOVA result showed significance of the fit [$F(1, 28) = 11.0221, p = 0.0025$]. Participants who reported feeling calm and confident during the design activity also experienced a higher level of presence.

Figure 14 presents the surveyed satisfaction levels and the Ping-Pong ball displacement. An ANOVA result of $F(1, 28)$

$= 6.0069 (p = 0.0208)$ indicated a significant correlation where participants who built a better functioned Ping-Pong ball displacing device felt more satisfied with their designs. Note that this feeling of satisfaction was independent of any outside knowledge of how other participants' devices performed.

No correlation between immersion and level of frustration or lever of confidence was found. In addition, no correlation between the type of design and surveyed qualities (frustration, engagement) were found.

4.7. Quantity of concepts

In addition to the surveyed qualities, the participants were asked how many concepts they generated before settling on their final design. Participants reported exploring an average of 2.9 ± 1.7 ideas during the design period (interquartile range = 2.3–3.5). Only 1 participant explored more than 10 ideas. A bivariate linear fit with a resulting ANOVA of $F(1, 28) = 0.665 (p = 0.422)$ showed no correlation between immersive tendencies and number of ideas generated. The correlation between presence and number of ideas resulted in $F(1, 28) = 1.049 (p = 0.314)$, showing that participants

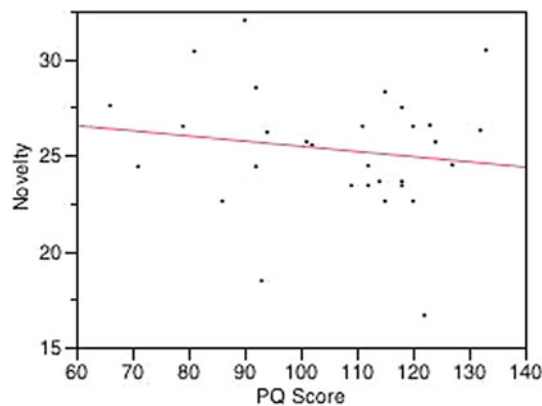


Fig. 10. (Color online) The novelty score versus Presence Questionnaire (PQ) score. A linear trend line is shown.

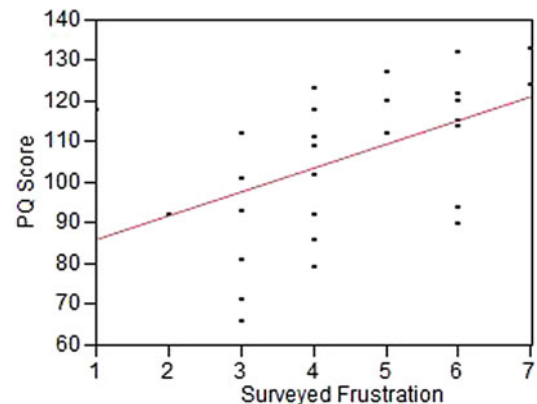


Fig. 12. (Color online) The Presence Questionnaire (PQ) score versus surveyed frustration (1 = frustrated, 7 = calm). A linear trend line is shown.

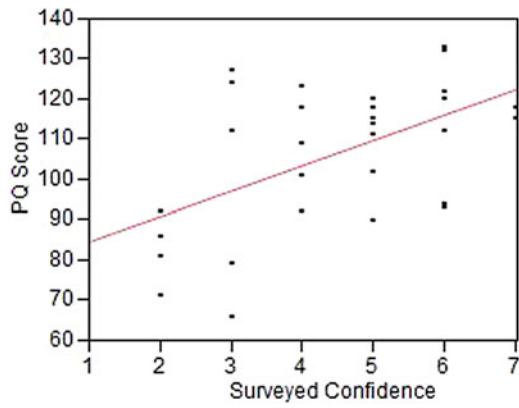


Fig. 13. (Color online) The Presence Questionnaire (PQ) score versus surveyed confidence (1 = unconfident, 7 = very confident). A linear trend line is shown.

who explored a higher number of concepts had a tendency for higher levels of presence.

4.8. Gender

Performance of the design activity between genders was analyzed using a one-way ANOVA. The design outcome for male participants was 22.61 ± 4.23 in. and for female participants 19.06 ± 3.74 in. [$F(1, 28) = 0.373, p = 0.546$]. Female participants scored 108.29 ± 4.50 on the ITQ, whereas males scored 106.38 ± 4.22 [$F(1, 28) = 0.096, p = 0.759$]. In the PQ, male participants scored 103.25 ± 4.51 and female participants scored 109.86 ± 4.82 [$F(1, 28) = 1.000, p = 0.336$]. Figure 15 shows the displacement outcome of the design for each gender.

Statistically speaking, there are no significant differences between the design outcome, immersive tendency, and presence score, and gender.

4.9. Education level

Performance of the design activity between participants with different education levels was analyzed using a one-way

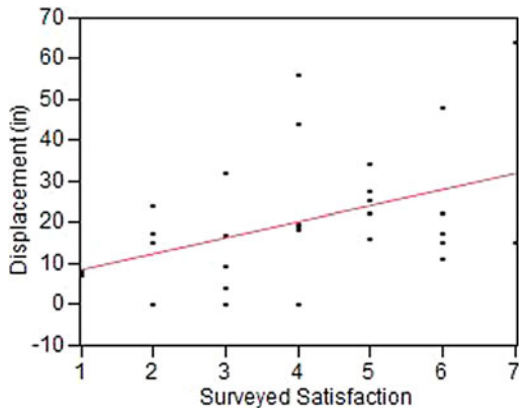


Fig. 14. (Color online) The displacement versus surveyed satisfaction (1 = unsatisfied, 7 = was satisfied). A linear trend line is shown.

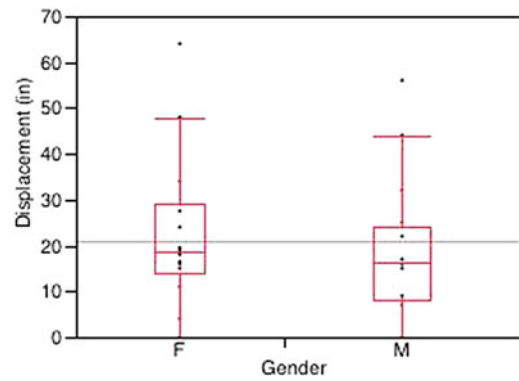


Fig. 15. (Color online) A box plot of ball displacement differences between female (F) and male (M) participants.

ANOVA (Fig. 16). The design outcome for high school degree participants was 21.44 ± 22.05 in., for bachelor degree participants was 21.25 ± 12.14 in., and for master degree participants was 18.71 ± 14.69 in. ($F = 0.0700, p = 0.9325$).

High school degree participants scored 114.67 ± 15.15 in the ITQ, while bachelor degree participants scored 107.00 ± 16.11 and master degree participants scored 98.29 ± 116.94 ($F = 2.0615, p = 0.1468$). In the PQ, high school degree participants scored 110.67 ± 20.93 , bachelor degree participants scored 109.28 ± 13.31 , and master or above degree participants scored 94.86 ± 20.12 ($F = 1.9883, p = 0.1565$).

It is interesting to see that, participants with the highest education level (master’s degree) have the lowest average immersion and presence score, and their average design outcome is the lowest too. Conversely, participants with the lowest education level (high school degree) have the highest average immersion and presence score as well as the best averaging design outcome. However, we cannot draw any conclusions about whether education level makes a difference or not because the differences are not significant.

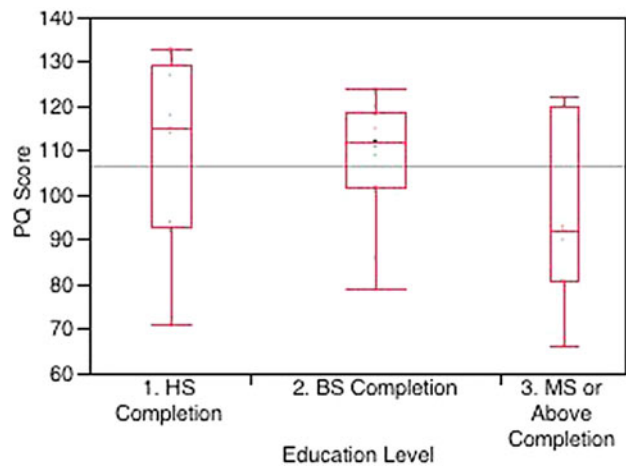


Fig. 16. (Color online) A box plot of Presence Questionnaire (PQ) score differences between different education levels (HS, completed high school; BS, completed bachelor of science; MS, completed master’s level or above).

5. OBSERVATIONS

All participants completed building a mechanism within 30 min. Only one participant built a design that was nonfunctional. In general, simple mechanisms (fewer parts) performed better than ones with more parts and complexity. This finding is consistent with earlier work (Yang, 2005*b*). Though given the chance to test the design during the building phase, none of the participants did so. The only testing of the mechanism was during the actual evaluation period at the end of 30 min. This is likely because the 30-min time period was roughly the minimum amount of time needed to finish the design task. Most of the participants concentrated on building their design up until the last minute. Most participants began building immediately and did not spend time “playing” around with the building blocks. Most focused on assembling a single complete design in the time allotted, as had been intended by the experimenters.

Often, the generation of few ideas typically suggest design fixation (reduced range of solutions and low novelty) has occurred (Linsey et al., 2010). Design fixation is a real problem in design practice and in the classroom, particularly when aspects of an example solution appear in the generated solutions. However, in this study, no example solutions were shown prior to the start of the design activity, and the 30-min time constraint of the experiment was intended to allow the building of one solution, rather than several. It is unclear whether fixation was occurring during the experiment. All participants’ design fell into three distinct categories, all of which were common mechanisms that the participants would likely be familiar with. However, the goal of the task was not to produce a novel design but to produce a design that would raise a ball as high as possible.

If more time had been available for the experiment, we conjecture that participants would have explored more designs. In addition, despite instructions during the design briefing that no sketching is allowed at any time, a third of the participants asked if they could sketch. Although sketching certainly aids in rapid generation of ideas, idea generation was not the focus of this user study.

6. CONCLUSIONS

6.1. What is the nature of immersion and presence in the context of early stage design-and-build activities?

The results indicate that designers’ sense of immersion and presence ranged widely, as well as their sense of frustration and calmness while performing the design activity. Participants with higher presence scores tended to attain ball displacements at both ends of the spectrum, very high and very low.

This study did not show effectively that people who were more engaged “in the moment” might be able to produce more effective designs or noticeably poorer designs. This finding is somewhat consistent with our initial expectation

of the link between presence and design outcome. This experiment did not reveal any significant correlation between immersion and presence. Previous research efforts (Jackson et al., 2001; Shernoff et al., 2003; Abuhamedh & Csikszentmihalyi, 2009) suggest that higher levels of immersion lead to an enhanced level of presence. This experiment did not confirm those studies, perhaps because of the physical nature of the prototyping environment made available to the subjects, rather than a virtual prototyping environment.

This experiment suggests that immersive tendencies are not linked to design outcome for this type of design-and-build task. Our observations of the participants showed that they generally spent all 30 min steadily building a single design. It is not clear why they did not explore more designs in the 30 min.

6.2. Do immersive tendencies correlate with better design?

Significant correlations between presence and ball displacement were found, but not between immersion and ball displacement. One possible reason is that this study assumed that if someone is not engaged or absorbed in an activity, he or she cannot do well. What this study suggests is that engagement/absorption is a necessary but not sufficient condition for performance. Just because an individual feels engaged in activity in the present moment does not mean he is excited about it or has a sense of playfulness as one might while immersed in an activity.

Most participants felt that if they had a goal to beat, their priorities would have changed. Instead of making a nice looking design (i.e., keep ball horizontal), they would have designed a less “elegant” design if the activity would have been more goal oriented. Few asked about using the table as an advantage to gain extra ball displacement. Only three asked to use the table to “extend” displacement to floor because there was no rule on table use.

Novelty seemed to be important in creating a successful design, but ideas that were the most novel (at the extreme end) were not as successful as those that were slightly less novel. Designs of average novelty generally functioned well. These were lower risk ideas with a lower chance of failure, but they were also less likely to be the most successful.

The implications of these findings are of interest for both education and practice. The underlying model behind active learning (Bonwell & Eison, 1991) is that learners will gain greater understanding if they are deeply engaged through learning activities beyond simply listening. Hands-on, design-and-build tasks are inherently an “active” design experience for the participant, but the results of this work suggest that the level of engagement is relevant and that engagement (presence) could serve as an indicator of design performance and learning.

7. FUTURE WORK

Design is a complex activity with many potential factors that can influence its outcome. In this study, the role of immersive and presence tendency in the design process were considered.

This study focused on a design-and-build activity so as not to confound the results, but future work could consider other activities that typically occur in concert with design-and-build. These include the act of sketching of potential design concepts during initial idea generation, as well as later in the design process. Sketching activity may provide a tool with which to observe design thinking and provide more insight into immersive tendencies. Sketching is a key activity in design, and many designers start with a sketch before they iterate on their designs. Because the goal of the experiment was to assess the relationship between a design-and-build activity and a participant's engagement in the activity, sketching intentionally was not allowed. There is certainly the possibility that the results would be different if sketching had been permitted. In addition, future studies could examine how the physical act of fabrication of parts can affect the sense of engagement. The larger goal of this work would be to formulate a richer, more comprehensive understanding of immersive tendencies of designers while engaged in early stage design activities.

ACKNOWLEDGMENTS

The work described in this paper was partly supported by the National Science Foundation under Award CMMI-1130791. The opinions, findings, conclusions, and recommendations expressed are those of the authors and do not necessarily reflect the views of the sponsors. This work was also partially supported by a Cummins-Tsinghua Women Fellowship.

REFERENCES

- Abuhamdeh, S., & Csikszentmihalyi, M. (2009). Intrinsic and extrinsic motivational orientations in the competitive context: an examination of person-situation interactions. *Journal of Personality and Social Psychology* 77(5), 1615–1635.
- Banerjee, P., & Basu-Mallick, D. (2003). Measuring the effectiveness of presence and immersive tendencies on the conceptual design review process. *Journal of Computing and Information Science in Engineering* 3(2), 166–169.
- Banerjee, P., Bochenek, G., & Ragusa, J. (2002). Analyzing the relationship of presence and immersive tendencies on the conceptual design review process. *Journal of Computing and Information Science in Engineering* 2(1), 59–64.
- Bonwell, C.C., & Eison, J.A. (1991). *Active Learning: Creating Excitement in the Classroom*. Washington, DC: George Washington University, School of Education and Human Development.
- Cross, N. (2011). *Design Thinking: Understanding How Designers Think and Work*. New York: Bloomsbury Academic.
- Csikszentmihalyi, M. (1996). *Creativity: Flow and the Psychology of Discovery and Invention*. New York: HarperCollins.
- Darken, R., Bernatovich, D., Lawson, J., & Peterson, B. (1999). Quantitative measures of presence in virtual environments: the roles of attention and spatial comprehension. *CyberPsychology & Behavior* 2(4), 337–347.
- Elsen, C., Demaret, J., Yang, M.C., & Leclercq, P. (2012). Sketch-based interfaces for modeling and users' needs: redefining connections. *Artificial Intelligence for Engineering Design, Analysis and Manufacturing* 24(3), 303–316.
- Gerber, E. (2009). Prototyping: facing uncertainty through small wins. *Proc. Int. Conf. Engineering Design (ICED'09)*, pp. 333–342. Stanford, CA.
- Gero, J.S. (1990). Design prototypes: a knowledge representation schema for design. *AI Magazine* 11(4), 26–36.
- Houde, S., & Hill, C. (1997). What do prototypes prototype? In *Handbook of Human-Computer Interaction* (Helander, M., Landauer, T., & Prabhu, P., Eds.). Amsterdam: Elsevier Science.
- Insko, B.E. (2003). Measuring presence: subjective, behavioral and physiological methods. In *Being There: Concepts, Effects and Measurement of User Presence in Synthetic Environments* (Riva, F.D.G., & IJsselstein, W.A., Eds.). Amsterdam: IOS Press.
- Insko, M. (2001). Physiological measures of presence in virtual environments. *ACM Transactions on Graphics* 21(3), 645–652.
- Jackson, S.A., Thomas, P.R., Marsh, H.W., & Smethurst, C.J. (2001). Relationships between flow, self-concept, psychological skills, and performance. *Journal of Applied Sport Psychology* 13(11), 129–153.
- Linsey, J., Tseng, I., Fu, K., Cagan, J., & Wood, K. (2010). A study of design fixation, its mitigation and perception in engineering design faculty. *Journal of Mechanical Design* 132, 1–12.
- Mantovani, G., & Riva, G. (1999). "Real" presence: how different ontologies generate different criteria for presence, telepresence, and virtual presence. *Presence: Teleoperators and Virtual Environments* 8(5), 540–550.
- McMahan, A. (2003). Immersion, engagement and presence. In *The Video Game Theory Reader* (Wolf, M.J.P., & Perron, B., Eds.), pp. 67–86. New York: Routledge.
- Neeley, J., Lawrence, W., Lim, K., Zhu, A., & Yang, M.C. (2013). Building fast to think faster: exploiting rapid prototyping to accelerate ideation during early stage design. *Proc. ASME Design Theory and Methodology Conf.* Portland, OR: ASME.
- Nichols, S., Haldane, C., & Wilson, J. (2000). Measurement of presence and its consequences in virtual environments. *International Journal of Human-Computer Studies* 52(3), 471–491.
- Oehlberg, L., Lau, K., & Agogino, A. (2009). Tangible interactions in a digital age: medium and graphic visualization in design journals. *Artificial Intelligence for Engineering, Design Analysis and Manufacturing* 23(3), 237–249.
- Pausch, R., Proffitt, D., & Williams, G. (1997). Quantifying immersion in virtual reality. *Proc. 24th Annual Conf. Computer Graphics and Interactive Techniques*, pp. 13–18. New York: ACM Press.
- Robertson, G.G., Czerwinski, M., & van Dantzich, M. (1997). Immersion in desktop virtual reality. *Proc. Symp. User Interface Software and Technology (UIST)*. New York: ACM Press.
- Robinett, W. (1992). Synthetic experience: a proposed taxonomy. *Presence: Teleoperators & Virtual Environments* 1(2), 229–247.
- Samana, R., Wallach, H., & Safir, M. (2009). The impact of personality traits on the experience of presence. *Proc. Virtual Rehabilitation Int. Conf.* Haifa, Israel.
- Sass, L., & Oxman, R. (2006). Materializing design: the implications of rapid prototyping in digital design. *Design Studies* 27(3), 325–355.
- Schön, D.A. (1983). *The Reflective Practitioner: How Professionals Think in Action*. New York: Basic books.
- Schubert, T.W., Friedmann, F., & Regenbrecht, H.T. (1999). Decomposing the sense of presence: factor analytic insights. *Proc. 2nd Int. Workshop on Presence*. University of Essex, Colchester, April 6–7.
- Shah, J.J., Vargas-Hernandez, N., & Smith, S.M. (2003). Metrics for measuring ideation effectiveness. *Design Studies* 24(2), 111–134.
- Sherhoff, D.J., Csikszentmihalyi, M., Shneider, B., & Shernoff, E.S. (2003). Student engagement in high school classrooms from the perspective of flow theory. *School Psychology Quarterly* 18(2), 158–176.
- Slater, M. (1999). Measuring presence: a response to the Witmer and Singer Questionnaire. *Presence: Teleoperators & Virtual Environments* 8(5), 560–566.
- Song, S., & Agogino, A.M. (2004). Insights on designers' sketching activities in product design teams. *Proc. 2004 ASME Design Engineering Technical Conf.*, pp. 351–360. Salt Lake City, UT: ASME.
- Stothard, P., Mitra, R., & Kovalev, A. (2008). Assessing levels of immersive tendency and presence experienced by mine workers in interactive training simulators developed for the coal mining industry. *Proc. SimTec 2008 Simulation Conf.*, pp. 1–6.
- Swindells, C., Po, B., Hajshirmohammadi, I., Corrie, B., Dill, J., Fisher, B., & Booth, K. (2004). Comparing CAVE, wall, and desktop displays for navigation and wayfinding in complex 3D models. *Proc. Computer Graphics Int., 2004*, pp. 420–427.
- Ullman, D.G. (2003). *The Mechanical Design Process*, 3rd ed. New York: McGraw-Hill.
- Ullman, D.G., Wood, S., & Craig, D. (1990). The importance of drawing in the mechanical design process. *Computers & Graphics* 14(2), 263–274.

- Usoh, M., Catena, E., Arman, S., & Slater, M. (2000). Using presence questionnaires in reality. *Presence: Teleoperators & Virtual Environments* 9(5), 497–503.
- van der Lugt, R. (2005). How sketching can affect the idea generation process in design group meetings. *Design Studies* 26(2), 101–122.
- Verlinden, J., de Smit, A., & Horváth, I. (2004). Case-based exploration of the augmented prototyping dialogue to support design. *Proc. Tools and Methods of Competitive Engineering*, pp. 245–254.
- Viswanathan, V.K., & Linsey, J.S. (2012). Physical models and design thinking: a study of functionality, novelty and variety of ideas. *Journal of Mechanical Design* 134(9), 091004.
- Welch, R.B. (1999). How can we determine if the sense of presence affects task performance? *Presence: Teleoperators & Virtual Environments* 8(5), 574–577.
- Witmer, B., & Singer, M. (1998). Measuring presence in virtual environments: a presence questionnaire. *Presence: Teleoperators & Virtual Environments* 7(3), 225–240.
- Yang, M.C. (2005a). Does sketching skill relate to good design? *Proc. Design Theory and Methodology Conf.*, pp. 301–308. Long Beach, CA.
- Yang, M.C. (2005b). A study of prototypes, design activity, and design outcome. *Design Studies* 26(6), 649–669.
- Yang, M.C. (2009). Observations of concept generation and sketching in engineering design projects. *Research in Engineering Design* 20(1), 1–11.
- Ye, N., Banerjee, P., Banerjee, A., & Dech, F. (1999). A comparative study of assembly planning in traditional and virtual environments. *Systems, Man, and Cybernetics, Part C: Applications and Reviews* 29(4), 546–555.
- Zeltzer, D. (1992). Autonomy, interaction, and presence. *Presence: Teleoperators & Virtual Environments* 1(1), 127–132.

Daniela Faas is the Senior Preceptor in Design Instruction in the School of Engineering and Applied Science at Harvard University and a Research Affiliate in the Department of Mechanical Engineering at MIT. Dr. Faas received her PhD in mechanical engineering and human computer interaction at Iowa State University in 2010. She was the Shapiro Postdoctoral Fellow in the Department of Mechanical Engineering at MIT from July 2010 to July 2012. Her research interests include virtual reality applications in mechanical design, design methodology, and engineering education.

Qifang Bao is a master's student in the Department of Mechanical Engineering at MIT. She earned a BS in mechanical engineering from Tsinghua University, Beijing, China, and won a Cummins–Tsinghua Women Fellowship. Her research interests include design preferences and design of energy systems.

Daniel D. Frey is a Professor of mechanical engineering and engineering systems at MIT. He attained his BS in aeronautical engineering from Rensselaer Polytechnic Institute, his MS in mechanical engineering from the University of Colorado, and his PhD in mechanical engineering from MIT. Professor Frey has won best paper awards from ASME, INCOSE, and IEEE; won two R&D 100 Awards; and was a Content Director in a show that won a Peabody award. He is a Fellow of ASME. Dr. Frey conducts research on robust design of engineering systems and design with the developing world.

Maria C. Yang is an Associate Professor of mechanical engineering and engineering systems at the Massachusetts Institute of Technology, where she joined the faculty in 2007. She earned her BS in mechanical engineering from MIT and her MS and PhD from Stanford University. Professor Yang has been recognized for her research by an NSF Graduate Fellowship, an NSF Faculty Early Career Development (CAREER) award, the Robert N. Noyce Career Development Assistant Professorship, and a Best Paper award from the ASME Design Theory and Methodology Conference in 2013. Dr. Yang's research interests are in design of products and systems. Her current work focuses on the fundamental role of informal design representation in driving the early stages of the design process.